

ZAmoD Gear

Packages with plastic-coated ropes for the modernization of geared elevators

Up above 1:1 suspension	320 kg	450 kg	630 kg	630 kg
Nominal speed	0,5 - 1,0 m/s	0,5 - 1,0 m/s	0,5 - 0,8 m/s	1,0 m/s
Car weight	300 - 800 kg	450 - 850 kg	450 - 940 kg	450 - 940 kg
Counterweight	40 - 50 %			
Rope distance	420 - 1100 mm			
Number of ropes	4	5	6	6
Traction sheave diameter	120 mm	120 mm	160 mm	160 mm
Motor	ZAtop SM132.21/BS	ZAtop SM132.35/BS	ZAtop SM200.23D	
Frame	ZAframe MK2850B			
Frequency inverter	ZAdyn 4CS011			ZAdyn 4CS013

Scope of delivery

Motor incl. mechanical brake with a hand release system

With proximity switch

Frequency inverter

ZAdyn frequency inverter, pre-parameterized and ZAmoD STICK

Frame


Including deflection roller and insulation elements
Rope distance adjustable

Cables

Motor, encoder and control cables

Ropes and accessories

Plastic-coated ropes 8.1 mm, rope sockets, rope clips

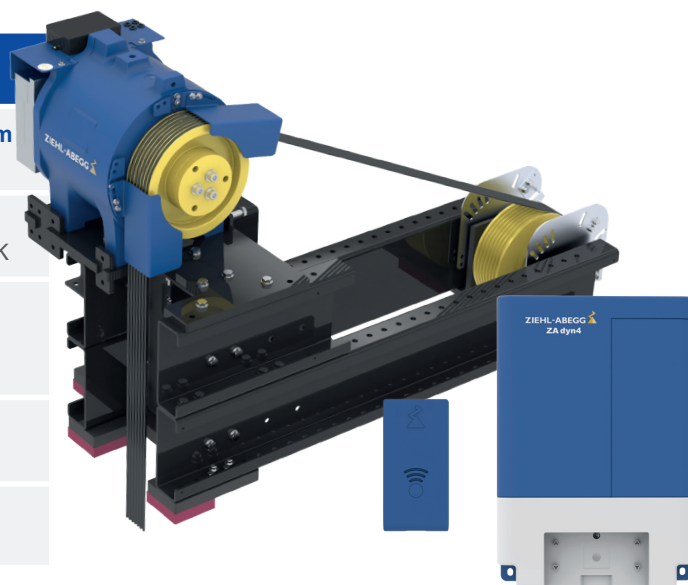

Your contact